


PRODUCTIVITY, COST EFFICIENCY & SERVICE TO THE FARMER

B70 ROUND BALER



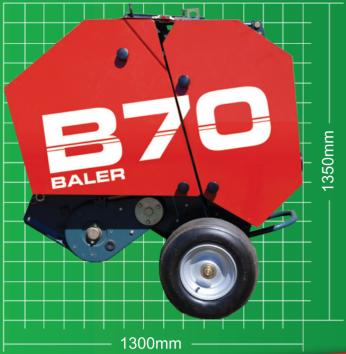

Weight & dimensions:

Length	130cm
Width	130cm
Height	135cm
Weight (Approx)	440kg
Pickup Width	80cm
	60-90 (bales/hour)
Tyres	16 x 6.50-8-4PR (tyre size)
Tractor requirement	18-37 kW (25-50 HP)
Bales size 61	x 70cm (Diameter x Width)

Hassle free access to all moving parts and easy lubrication thanks to hinged doors

3 bale density settings

Continuous roller design ensures better compaction, shape and

density of each bale



Features:

Highly manouevrable, Low maintenance. Continuous roller design. 3-Point mounting, Low power requirement, 3 Bale density settings,

Smaller bale size - easier to handle.

Self -contained hydraulic system (can be used by all tractors).

Reliable and low maintenance binding system. Automatic trigger for twine binding.

Three point mounting offers the following benefits:

No unnecessary wear and tear during road transport; Easy turning in tight conditions; No possibility for damage to be caused when reversing; Minimal force on PTO shaft.

3 Settings to determine the amount of twine used to bind bale. System overload protection with shear bolts and a slip clutch. Audible signal for the start of the binding process Bales are water resistant and

can be stored outside.

With its Compact design you can bale grass in places you never thought possible eg: between vineyards, between citrus, nut and avo trees, between maize rows.

A chain and sprocket drive system means quiet operation and low maintenance.

